

FS30 Series AC-DC Converter Compact Case(Power tank II)



PCB MOUNT TYPE



CHASSIS MOUNT TYPE

Features

- UL, CE Approved
- RoHS directive compliance
- Encapsulated, compact case
- High efficiency
- Universal input(AC85~264V or DC110~340V)
- Surface mounting technology
- Built in EMI filter
- Inrush current limit
- 100kHz fixed frequency
- Fixed output voltage
- Thermal shutdown(IC-Temp: 140°C Min.)
- Low output ripple & noise
- Isolated input-output(3kVAC)
- Output short circuit protection
- Over voltage protection(O.V.P.)
- Over current protection(O.C.P.)
- 2Years warranty

Environmental

- Operating temperature range: -10°C~60°C
- Storage temperature range: -20°C~70°C
- Humidity: 20%~90%RH
- Vibration: 10-55Hz at 10G(98m/s²), 3minutes period, 60minutes each one X, Y and Z axis
- Impact: 50G(490m/s²), 11ms, once each
- Cooling method: natural air convection
- MTBF(MIL-HDBK-217F): 3.5*10⁵hours

Safety

- UL (UL60950, CSA C22.2 NO.60950)
- UL No: E227474
- CE(EN60950) – through TÜV

Description

The FS30 Series has universal AC input and there are 5 models with single output, 2models with dual output. And 2models with triple output. Compact size with high reliability are achieved. A built in EMI filter is reduced the noise level .

FS30 Series AC-DC Converter Compact Case(Power tank II)

Electrical specifications		
INPUT	Voltage	AC85~264V (or DC 110~340V) 50/60Hz (note)
	Current	0.49A Max. @ 110VAC / 0.25A Max. @ 220VAC
	Frequency	47~440Hz Max. (50~60Hz typ.)
	Efficiency	80% Typ.
	Inrush current (at cold start)	30A Max. @ 120VAC. / 60A Max. @ 240VAC
	Leakage current	0.5mA Max. @ 110VAC / 0.75mA Max. @ 220VAC
OUTPUT	Voltage tolerance (accuracy)	±2% Max. ±3% Max(complementary dual).
	Ripple and noise	±1% Typ.
	Line regulation	±1% Typ.
	Load regulation	±1% Typ.@output1 / ±2% Typ.@output2,3
	Dynamic load regulation	±3% Typ.@output1
	Temperature regulation	±1% Typ.
	Rising time	400ms Max.
	Hold up time	10ms Min.

Protection circuit	
Over current protection	Works at over 105% of rating & recovers automatically
Over temperature protection	PWM IC-Temperature 140℃ Min. Latching, Recovering


Isolation specifications	
Isolation Resistance	DC 500V, 100MOhms Min.
Input-Output Isolation Voltage	AC 3KV, 1minute, 10mA.
Input-FG	AC 2KV, 1minute, 10mA.
Output-FG	AC 0.5KV, 1minute, 10mA.

General specifications	
Switching frequency	100kHz
Calculated MTBF	3.5*10 ⁵ hours
Weight	200g or less

NOTE: For cases that conform various safety specifications(UL, CSA, CE etc). It require input voltage and frequency range will be 100~240Vac, 50~60Hz.

FS30 Series AC-DC Converter Compact Case(Power tank II)

Ordering information

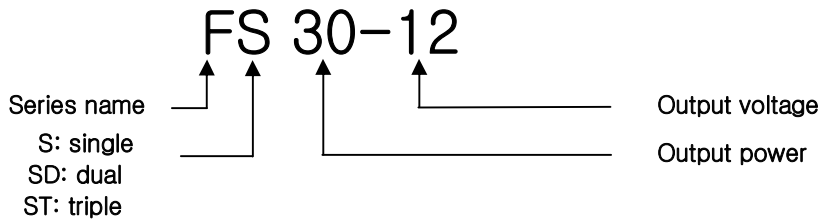


Input	Output1	Output2	Output3	Maximum power	Ripple & Noise	Efficiency typical	Model number
AC85~264V or DC110~340V	3.3V@6.0A			19.8W	80mVp-p	74%	FS30-3R3
	5V@6.0A			30W	80mVp-p	80%	FS30-5
	12V@2.5A			30W	120mVp-p	84%	FS30-12
	15V@2.0A			30W	150mVp-p	84%	FS30-15
	24V@1.25A			30W	200mVp-p	84%	FS30-24
	+12V@1.25A	-12V@1.25A		30W	120/120mVp-p	80%	FSD30-1212
	+15V@1.0A	-15V@1.0A		30W	150/150mVp-p	80%	FSD30-1515
	+5V@3.0A	+12V@1.0A	-12V@0.3A	30.6W	80/120/120mVp-p	80%	FST30-522
	+5V@3.0A	+15V@0.7A	-15V@0.3A	30.0W	80/150/150mVp-p	80%	FST30-5FF


Pin assignments

Single output	Dual output	Triple output
1. FG	1. FG	1. FG
2. AC(N)	2. AC(N)	2. AC(N)
3. AC(L)	3. AC(L)	3. AC(L)
4. No connect	4. No pin	4. Output1
5. No pin	5. Output1	5. GND
6. Output1	6. GND	6. Output2
7. No pin	7. Output2	7. GND
8. GND	8. No pin	8. Output3

Derating curve

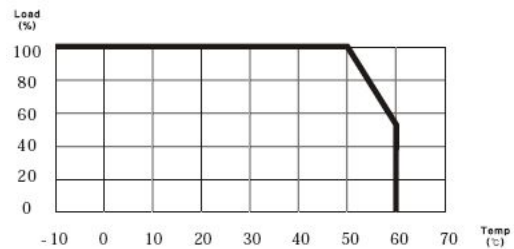

Dimensions

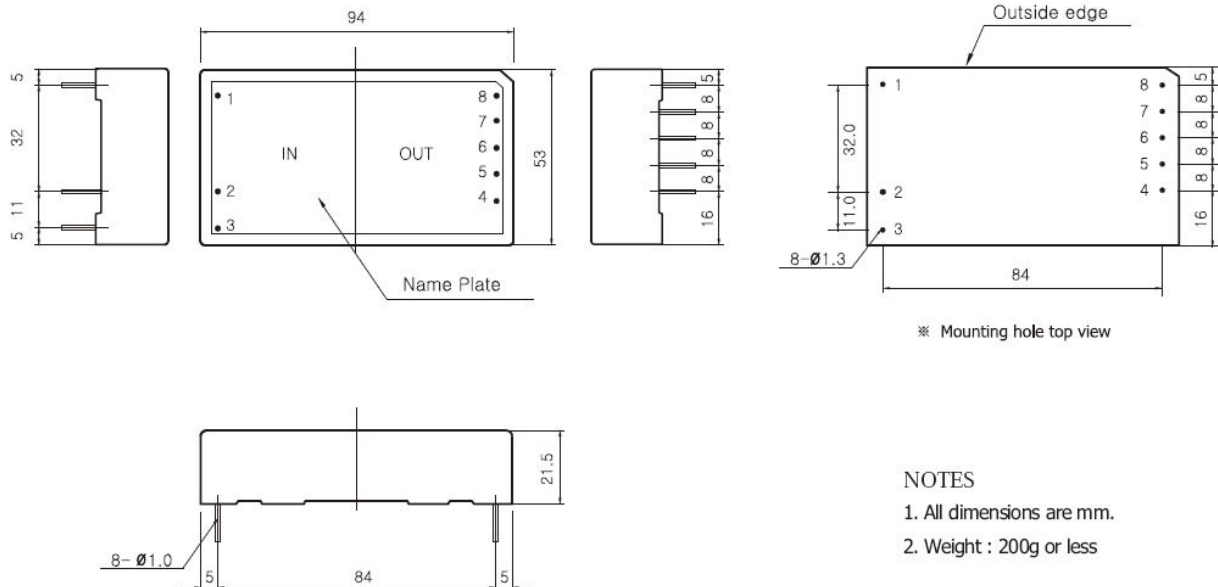


NOTES
1. All dimensions are mm.
2. Weight : 200g or less

FS30 Series AC-DC Converter Compact Case(Power tank II)


Inrush Current

TEST CONDITION


- 240Vac input
- Full load output
- PHASE 90° input start, current measure

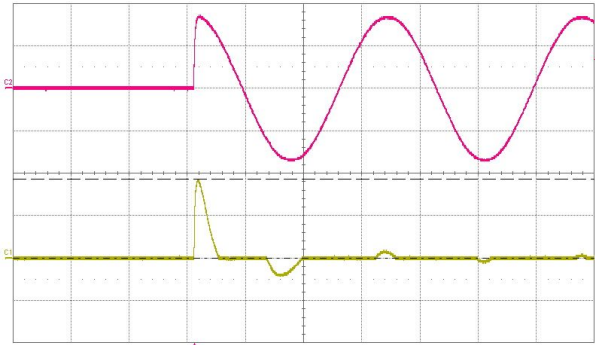


FS30-3R3 18.6A

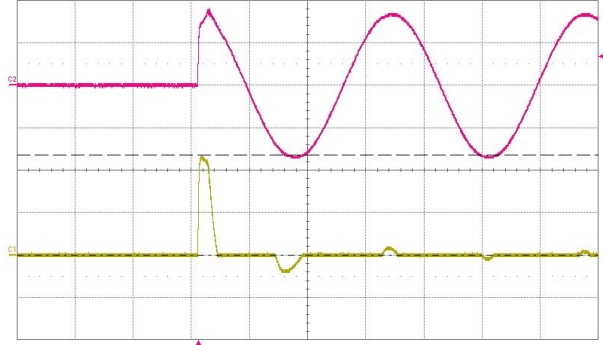


FS30-5 23.5A

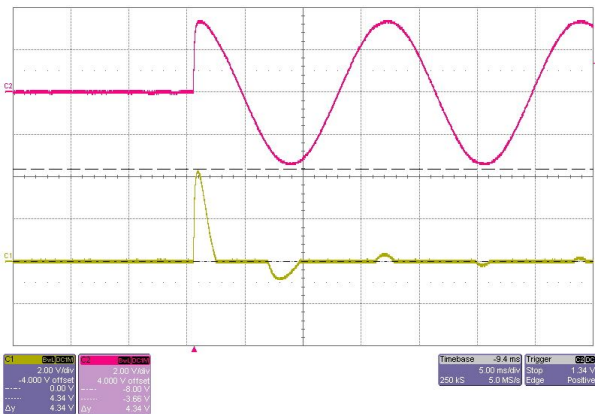

FS30-12 21.7A

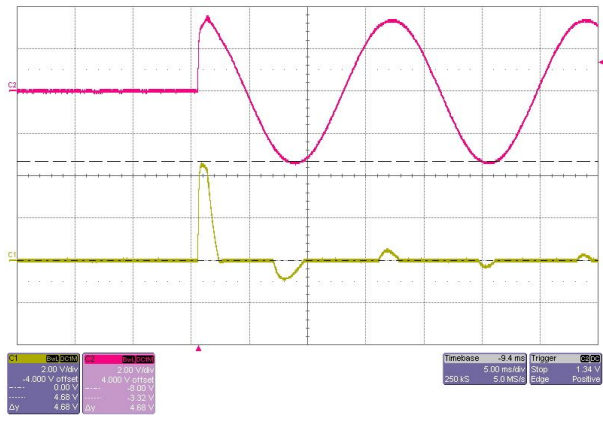

FS30-15 23.4A

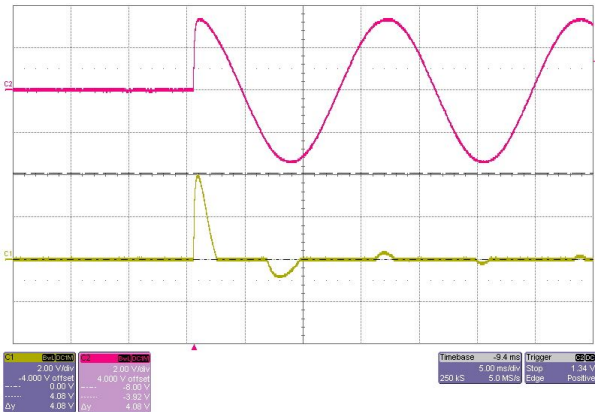

FS30-24 20.4A

Inrush current concerns wrong to fuse, input rectifier, power-switch, circuit break and parts. It degrades the another circuit voltage and occurs system error. If you defuse inrush current.

You add NTC or Inrush current limiter to external circuit.

High rating voltage input

Max30A @ 120Vac


Max60A @ 240Vac

FS30 Series AC-DC Converter Compact Case(Power tank II)

Rising Time

TEST CONDITION

- 100Vac Input
- Full Load Output
- Output Voltage 10% ~ 90% Rising Time Measure

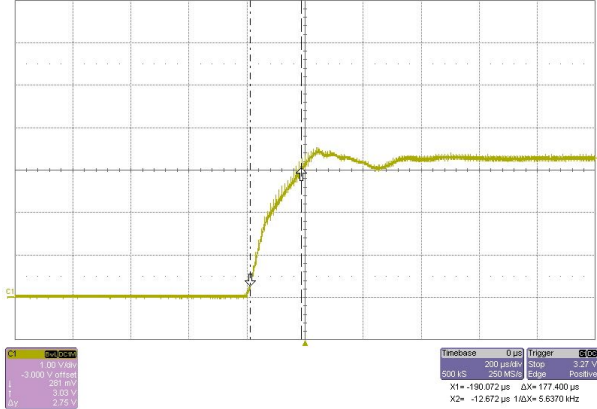


FS30-3R3 0.177ms




FS30-5 0.462ms



FS30-12 14.6ms

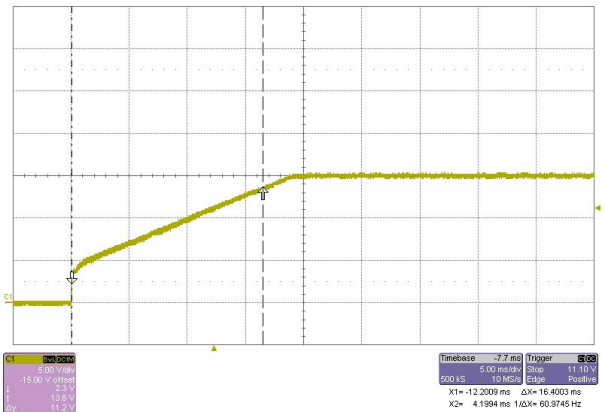

FS30-15 16.4ms

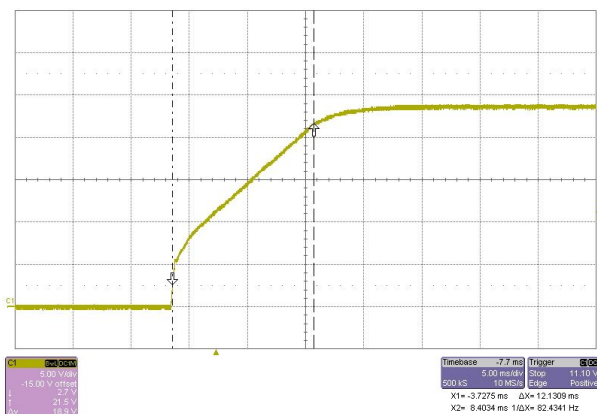

FS30-24 12.1ms


Max 100ms between output voltage 10%~90%

FS30 Series AC-DC Converter Compact Case(Power tank II)


Hold up Time

TEST CONDITION


- 100Vac Input
- Full Load Output
- When Input off Phase 0° or 360°, Output Voltage off Time Measure

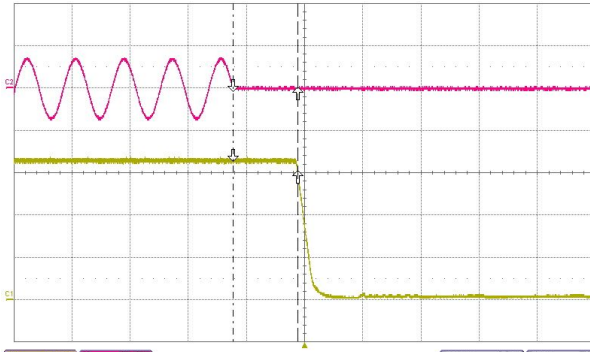


FS30-3R3 22.1ms

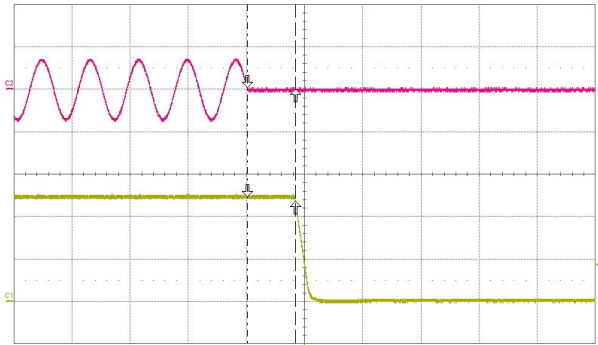


FS30-5 16.6ms

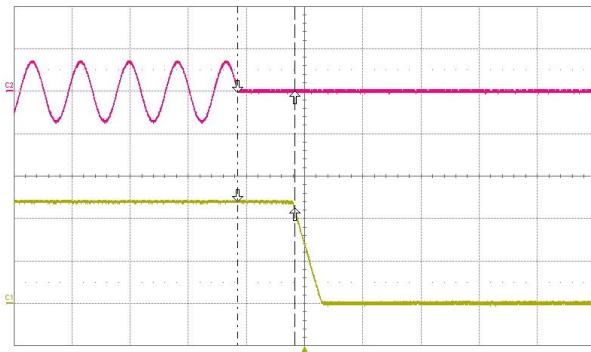

FS30-12 19.5ms

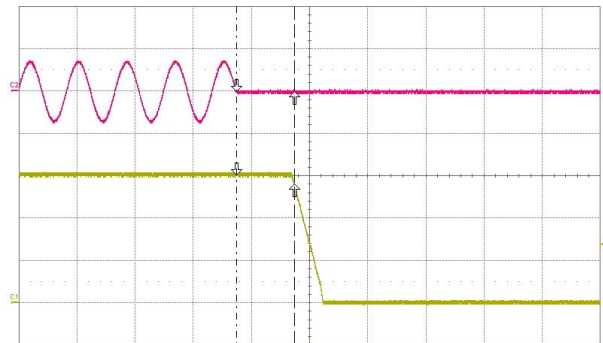

FS30-15 19.8ms

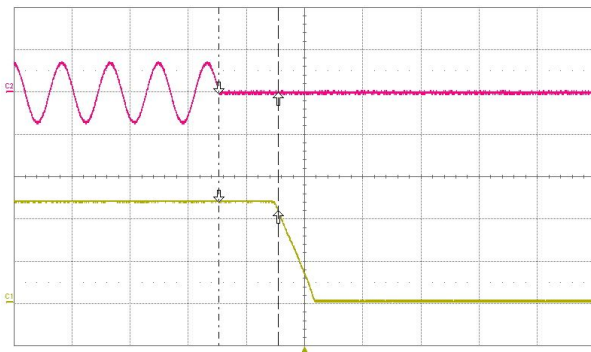

FS30-24 20.3ms


The amount of time that a power supply's output-voltage remains within the specified-voltage ranges after it's input voltage interrupts. Low rating voltage Minimum 10ms @100Vac input

FS30 Series AC-DC Converter Compact Case(Power tank II)


Start up Time

TEST CONDITION


- 100Vac Input
- Full Load Output
- When Input on Phase 360°, Output Voltage 100% rise Time Measure

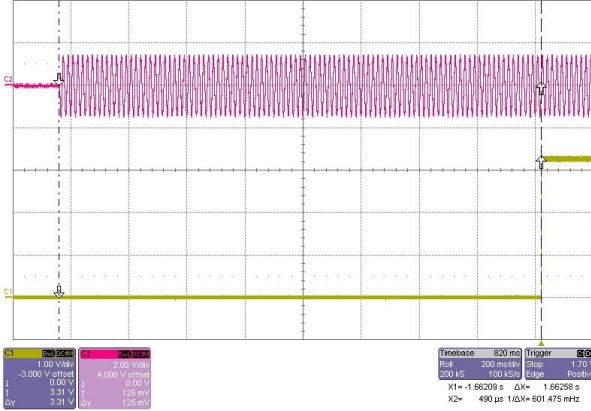


FS30-3R3 1.66S

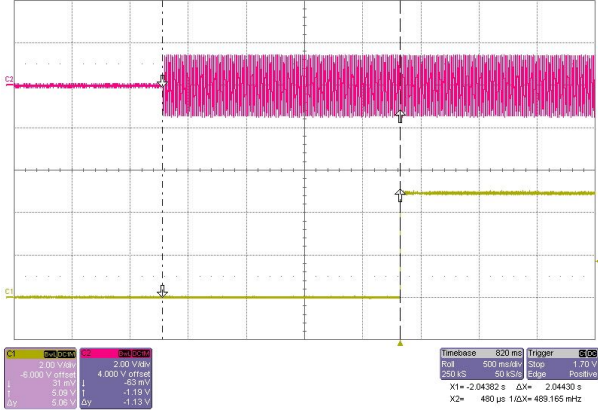


FS30-5 2.04S

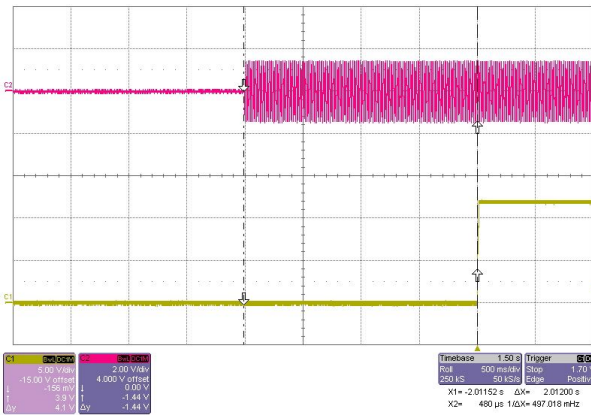

FS30-12 2.01S

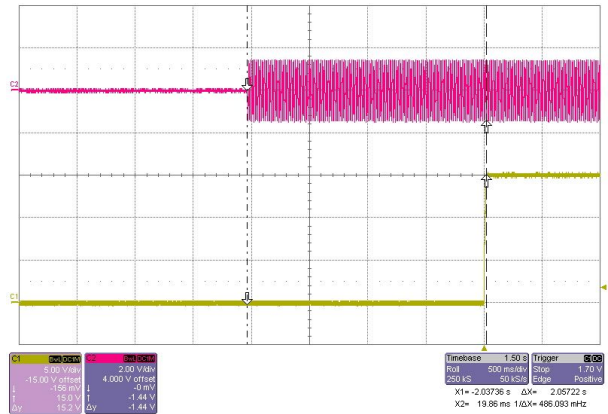

FS30-15 2.06S

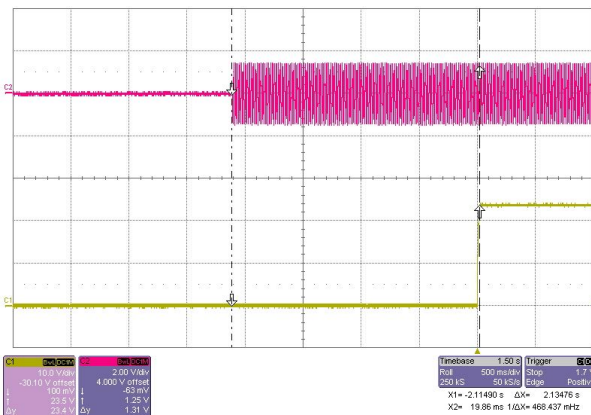

FS30-24 2.14S


Amount of delay time and rise time. After input-voltage injects.

FS30 Series AC-DC Converter Compact Case(Power tank II)


Dynamic Load Regulation

TEST CONDITION


- 100Vac Input
- 0% Load ~ 100% Load Output
- Freq. : 100Hz , - Duty : 0.5

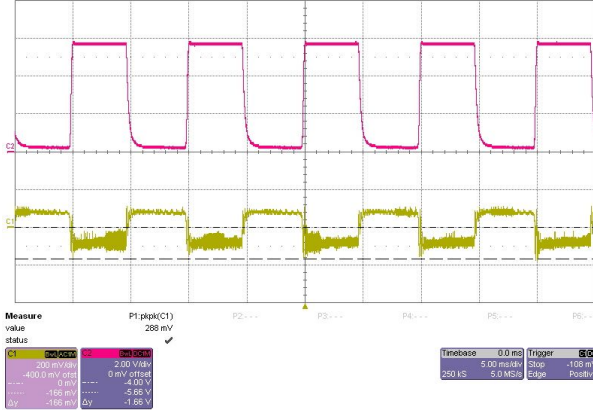


FS30-3R3 166mV

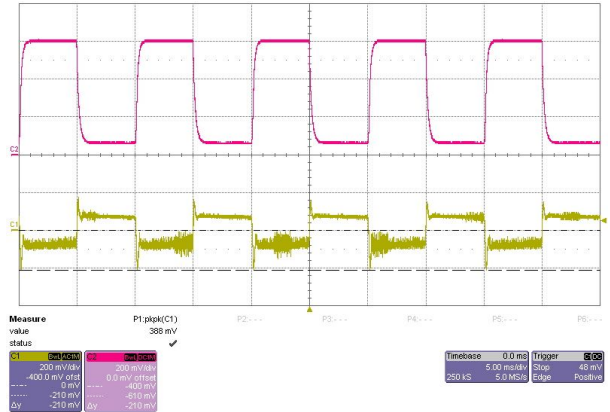


FS30-5 210mV

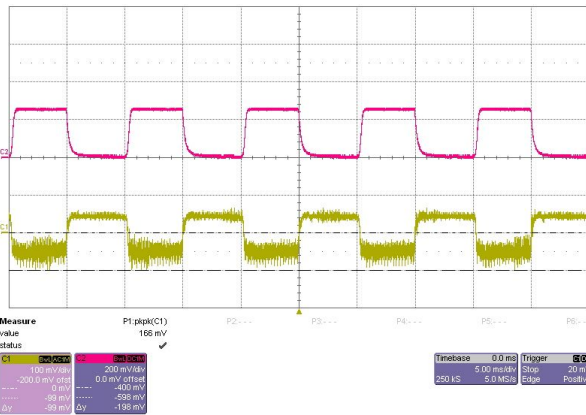

FS30-12 99mV

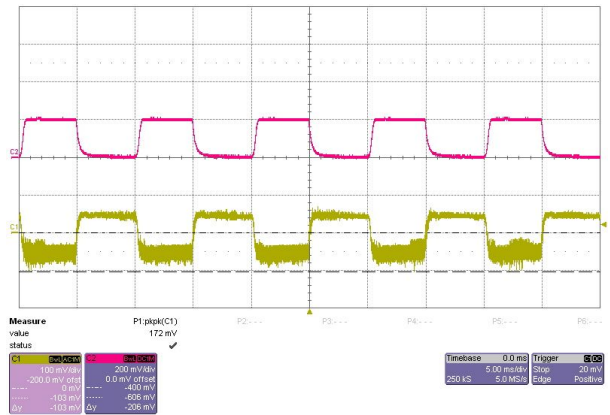

FS30-15 103mV

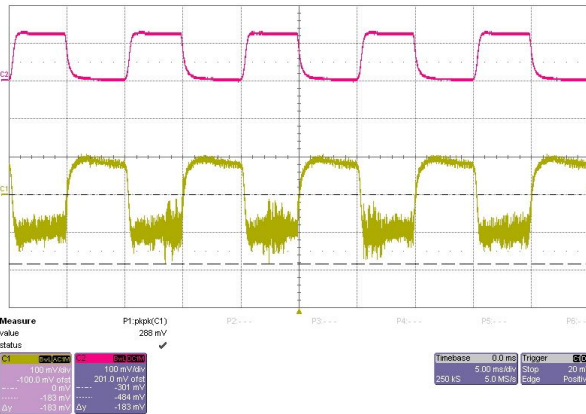


FS30-24 183mV

Considerate slew rate and frequency within $\pm 3\%$ output voltage value. Except FS30-3R3, FS30-5 are within $\pm 5\%$ output voltage value.


FS30 Series AC-DC Converter Compact Case(Power tank II)

Over Shoot


TEST CONDITION	<ul style="list-style-type: none"> - 240Vac Input - Full Load Output
----------------	--

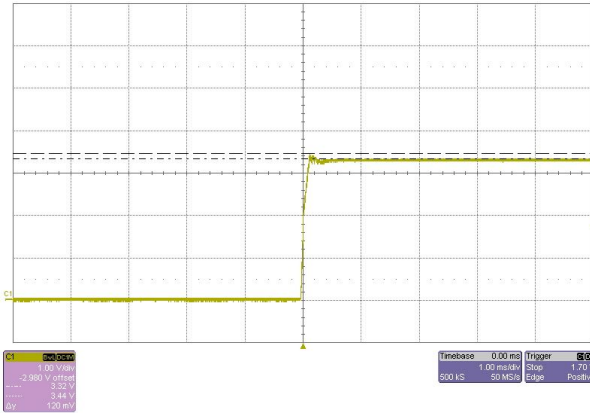


FS30-3R3 0.12V

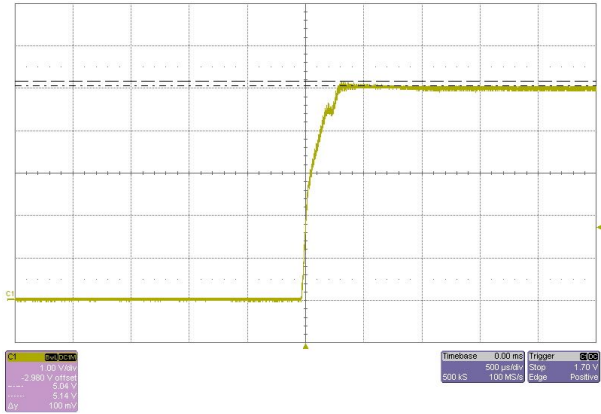


FS30-5 0.1V

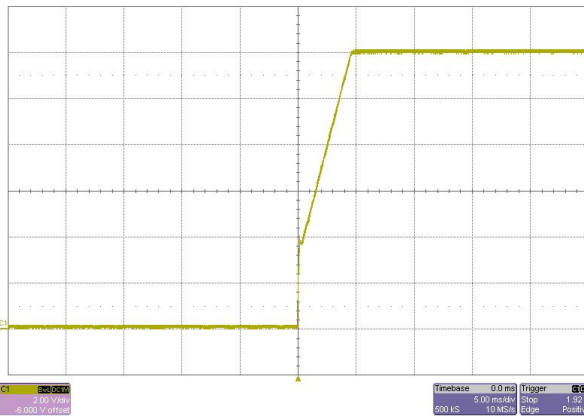

FS30-12 0V

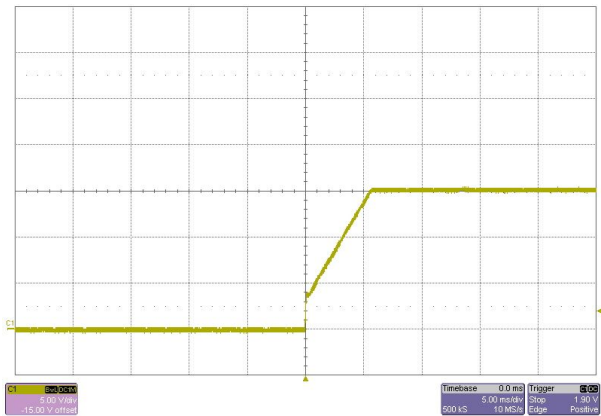

FS30-15 0V

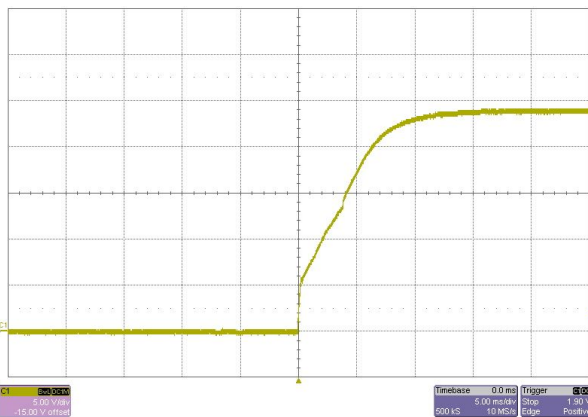

FS30-24 0V


When turn-on, the output overshoot voltage shall not exceed 5% of normal Voltage value no Load or full Load connected.

FS30 Series AC-DC Converter Compact Case(Power tank II)


Output Ripple & Noise

TEST CONDITION


- 100Vac Input
- Full Load Output
- Ele-cap(47uF)and Ceramic-cap(104), Output Terminal

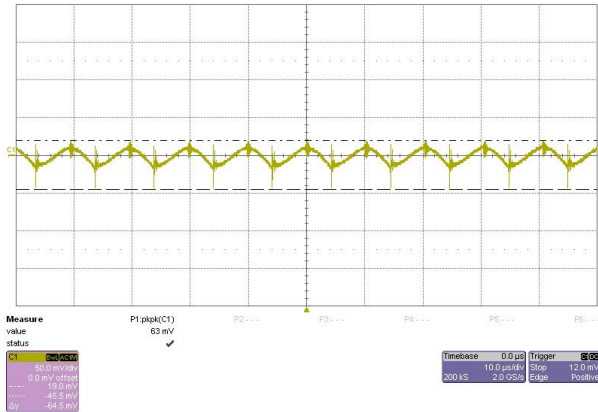


FS30-3R3 64.5mVpp

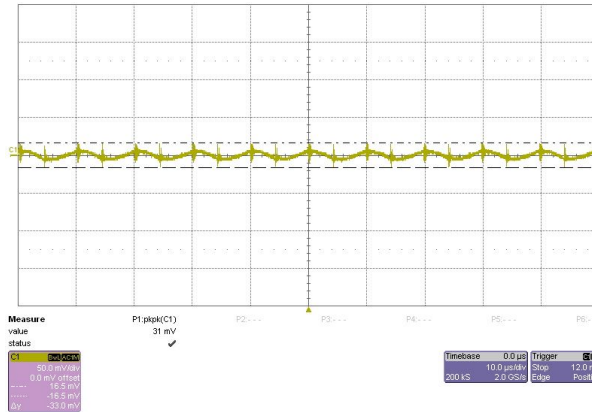


FS30-5 33.0mVpp

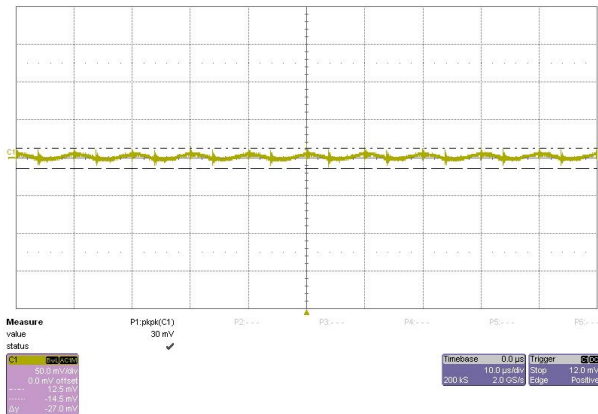

FS30-12 27.0mVpp

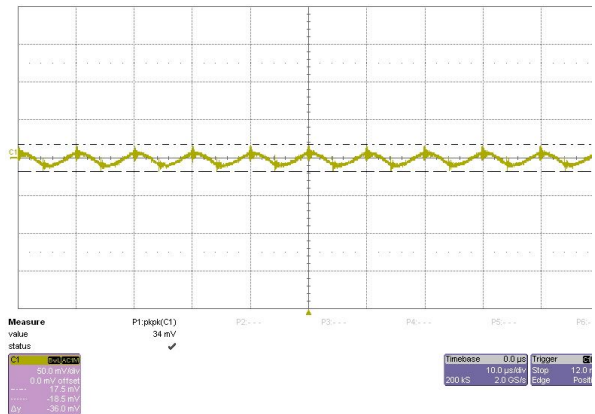

FS30-15 36.0mVpp

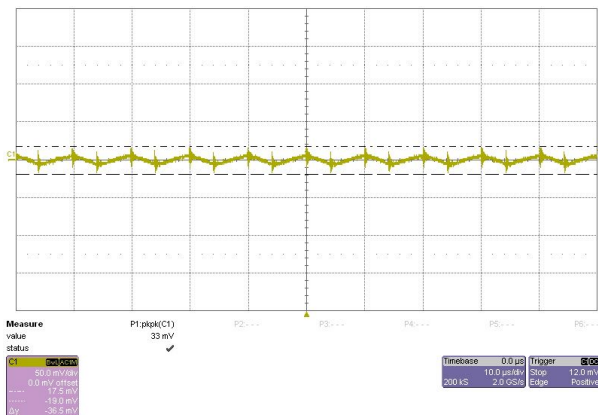


FS30-24 36.5mVpp

*Ripple & Noise: Oscilloscope bandwidth 20MHz.
The length of the output line should be shorter than 1meter and it needs to be twisted.


FS30 Series AC-DC Converter Compact Case(Power tank II)

Efficiency Curve(Load Variation)

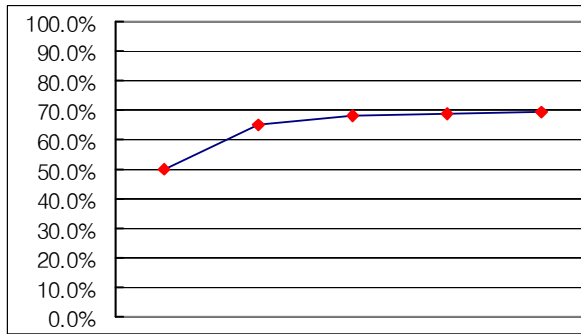


Load(%)	10	25	50	75	100
Eff(%)	50.0	65.2	68.4	68.6	69.2

FS30-3R3 / 3.3V 6.0A

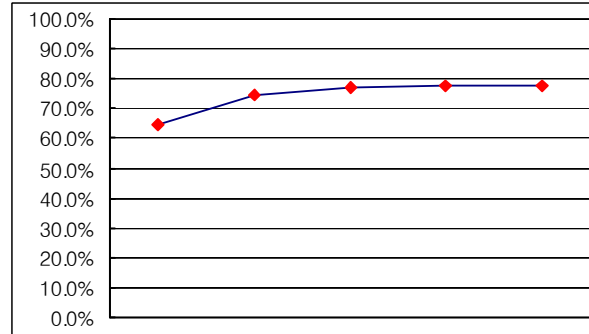


Load(%)	10	25	50	75	100
Eff(%)	64.6	74.6	77.1	77.9	77.7

FS30-5 / 5V 6.0A

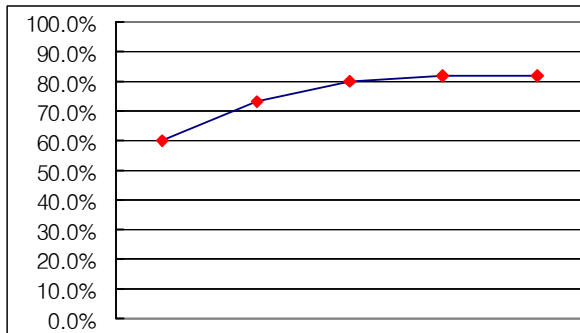


Load(%)	10	25	50	75	100
Eff(%)	59.9	73.3	79.7	81.7	82.2

FS30-12 / 12V 2.5A

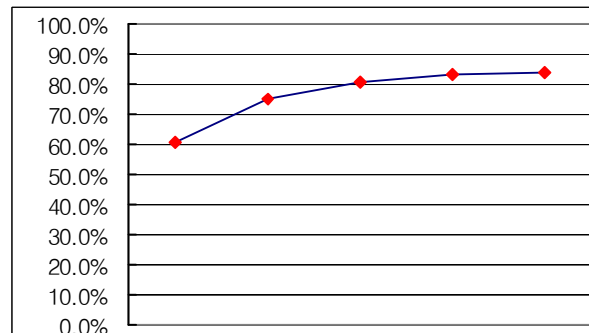

Load(%)	10	25	50	75	100
Eff(%)	60.6	74.9	80.5	83.0	83.5

FS30-15 / 15V 2.0A

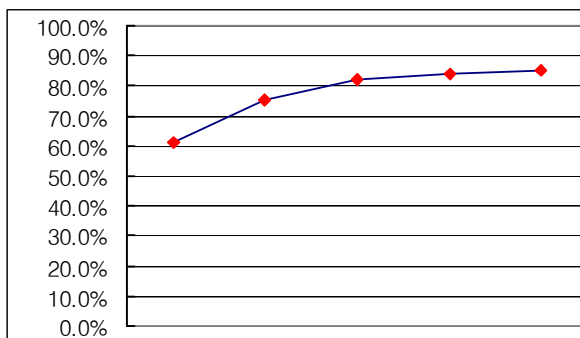


Load(%)	10	25	50	75	100
Eff(%)	61.3	75.5	81.8	83.9	84.9

FS30-24 / 24V 1.25A

Input 220Vac, Variation of efficiency, from minimum load to maximum load.


FS30 Series AC-DC Converter Compact Case(Power tank II)

Efficiency Curve(Input Voltage Variation)

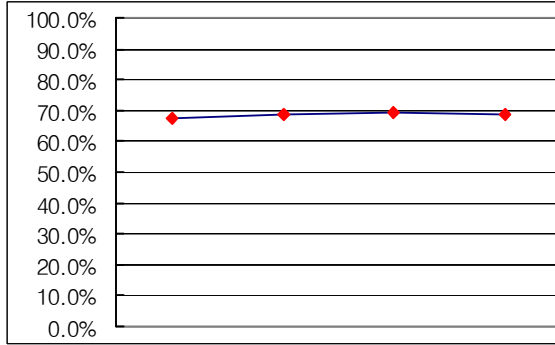


V in(V)	85	110	220	264
Eff(%)	67.4	68.8	69.3	68.8

FS30-3R3 / 3.3V 6.0A

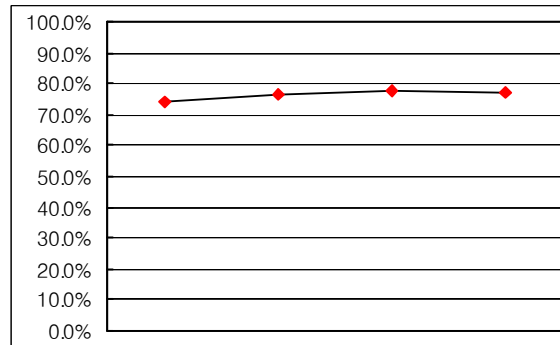


V in(V)	85	110	220	264
Eff(%)	74.0	76.3	77.6	76.9

FS30-5 / 5V 6.0A

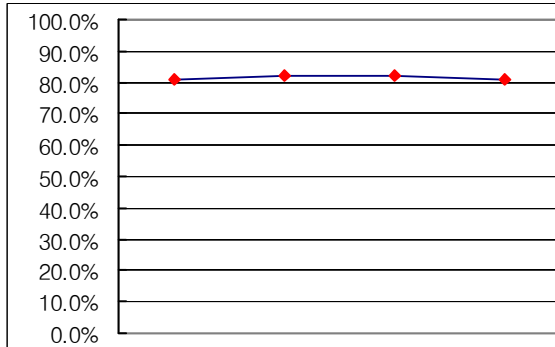


V in(V)	85	110	220	264
Eff(%)	80.7	82.4	82.1	80.9

FS30-12 / 12V 2.5A

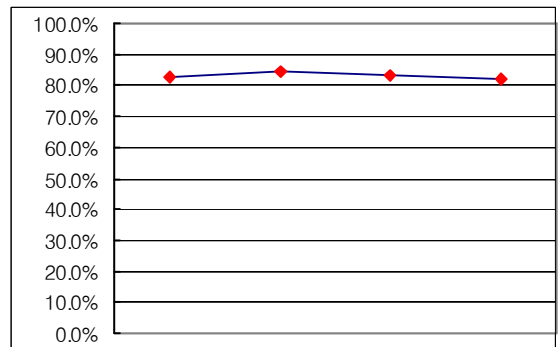

V in(V)	85	110	220	264
Eff(%)	82.8	84.3	83.3	81.8

FS30-15 / 15V 2.0A

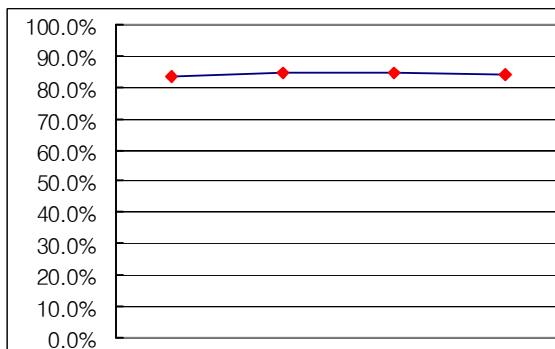

V in(V)	85	110	220	264
Eff(%)	83.4	84.9	84.9	83.8


FS30-24 / 24V 1.25A

Variation of Efficiency, from Minimum input Voltage to Maximum input Voltage

FS30 Series AC-DC Converter Compact Case(Power tank II)

Electro Magnetic Interference Application.

FS30 Series is needs to reduce Electromagnetic Interference, use the external L-C noise filter at the input of the Converter.

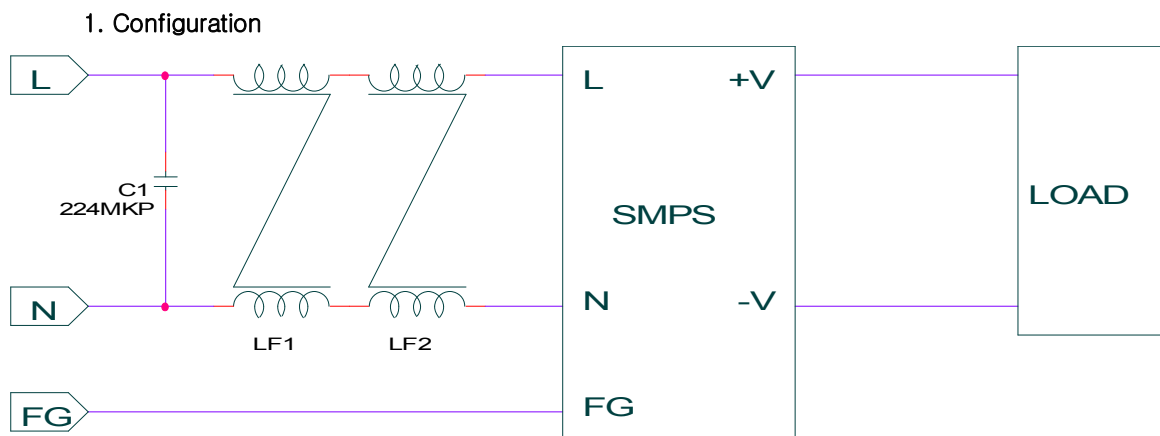

2. Components

C1 = 220nF / 275Vac, X2 Capacitor

LF1 = 20mH Common Mode Line Filter, Toroidal core ϕ 14.0mm

LF2 = 20mH Common Mode Line Filter, Toroidal core ϕ 14.0mm

FS30 Series AC-DC Converter Compact Case(Power tank II)

Calculating Reliable Values of MTBF

1. Calculating method

Calculated based on part count reliability projection of MIL-HDBK-217F Individual failure rates λ_g is given to each part and MTBF (Mean Time Between Failure) is calculated by the count of each part.

<Formula>:

$$MTBF = 1 / \lambda_{\text{equip}} = 1 / \left(\sum_{i=1}^n N_i (\lambda_G \Pi Q)_i \right) * 10^6 \text{ (Hours)}$$

λ_{equip} : Total Equipment Failure Rate (Failure/10⁶Hours)

λ_G : Generic Failure Rate for The ith Generic Part (Failure/ 10⁶Hours)

ΠQ : Generic Quality Factor for The ith Generic Part ($\Pi Q=1$)

N_i : Quantity of ith Generic Part

n : Number of Different Generic Part Categories

2. MTBF Values

MTBF \approx 345,576 (Hours)

PART	Num.	Failure Rate	Failure Rate*n	Remark
	n	$\lambda_G(F/T)$	$\lambda_G \times n(F/T)$	
Logic IC	1	0.03600	0.03600	Separate
Transistor, FET	1	0.49500	0.49500	Separate
Diode Fast Recovery	3	0.12650	0.37950	
Diode General Purpose	1	0.01980	0.01980	
Diode Switching	2	0.00517	0.01034	
Diode Bridge	1	0.01980	0.07920	*4
Voltage Regulator	1	0.02400	0.02400	
Photo-coupler	1	0.14850	0.14850	
Thermister	1	0.01400	0.01400	
Capacitor-ele	6	0.01900	0.11400	
Capacitor-film	1	0.00700	0.00700	
Capacitor-ceramic	5	0.02600	0.13000	
Capacitor-MLCC	2	0.05300	0.10600	
Choke coil	1	0.00022	0.00022	
Switching trans	1	0.00420	0.00420	
Line Filter	1	0.00440	0.00440	
Resistor Chip	4	0.01600	0.06400	
Connector	6	0.05200	0.31200	
Reflow soldering	84	0.00014	0.01176	
Flow soldering	71	0.00780	0.55380	
PCB	1	0.37000	0.37000	
Fuse	1	0.01000	0.01000	
Total Equipment Failure Rate $\lambda_G \times n(F/T)$			2.89372	
MTBF = $10^6 / \lambda_G(F/T)$			345575.9369	


FS30 Series AC-DC Converter Compact Case(Power tank II)

Reliability Specification	Standard	Remarks
Dry heat	IEC60068-2-2	
Cold	IEC60068-2-1	
Thermal shock	IEC60068-2-14	
Temperature, humidity cycle	IEC60068-2-30, IEC60068-2-38	
Vibration	IEC 60068-2-6	
Mechanical shock	IEC 60068-2-27	
Electrostatic Discharge immunity	IEC 61000-4-2	
Immunity to radio frequency EM-fields	IEC 61000-4-3	
Electrical fast transient/burst immunity	IEC 61000-4-4	
Surge immunity	IEC 61000-4-5	
B10 Life test	B10 Life is the time by which 10% of the product population will get failed	

FS30 Series AC-DC Converter Compact Case(Power tank II)

Instruction manual

1. Basic connection

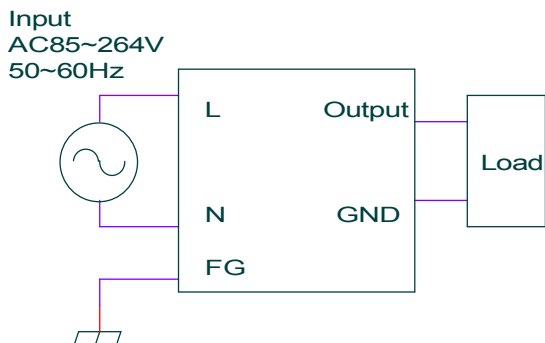

NOTE:


A: For safety as well as improved noise, ensure secure connection of the FG terminal to the ground terminal of the equipment.

B: To avoid excessive voltage drop and for improved noise, and short and thick wire should be used to connect the load. Length below 50Cm & wire thickness of 4.0A/mm² are recommended for reducing wire loss when wire connection is necessary.

2. Parallel Operation

This supply can be operated the following ways.

Choose a diode in accordance with voltage, power dissipation and heat radiation.

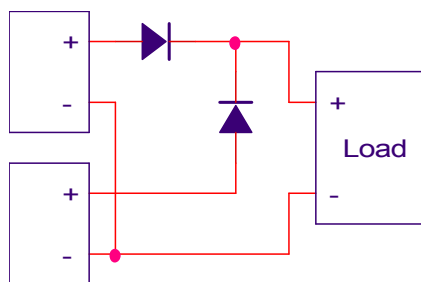



- Voltage : $V > V_o \times 3$
- Current : $I > I_o \times 3$
- Design a proper heat sink according to power loss at diode ($P_w = V_f \times I_o$)

- Use a schottky or fast recovery diode this has a low VF.

3. Series Operation

Choose a diode in accordance with voltage, power dissipation and heat radiation.

- Voltage : $V > V_o \times 3$
- Current : $I > I_o \times 3$
- Design a proper heat sink according to power loss at diode ($P_w = V_f \times I_o$).
- Use a schottky or fast recovery diode this has a low VF.

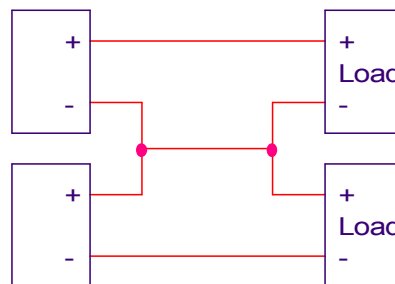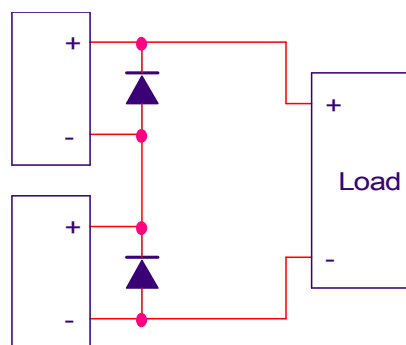

4. Over Current Protection

The FS30 Series is equipped with an over current protection circuit. When the short or overload condition is removed, the output will automatically recover. This setting is fixed and cannot be varied externally. If the short or overload condition continues, the power module could be damaged due to the heat condition.

FS30 Series AC-DC Converter Compact Case(Power tank II)

5. Over Voltage Protection

FS30 series are equipped with an over-voltage protection circuit by zener diode. If zener diode is opened, Vcc rise up, it becomes possible to implement an over voltage protection. Latch on mode. If zener diode is short, output is shorted.

It becomes possible to implement a short circuit Protection.

6. Over Temperature Protection

Temperature protection is provided by a precision analog circuit that turns the output MOSFET off when the junction temperature exceeds the thermal shutdown temperature (140°C Minimum). When the junction temperature cools to below the hysteretic temperature, normal operation resumes providing automatic recovery.

7. Line Regulation

Maximum line regulation is maximum output voltage change when the input volt is slowly varied with in the input voltage range.

8. Load Regulation

Maximum load regulation is maximum output voltage value change when varying the load current slowly within the standard output current range.

9. Isolation Resistance


The isolation resistance is more than 100MΩ at 500VDC when tested with DC isolation between the output and the case. Make sure that during testing, the isolation tester does not produce a high pulse when the applied voltage is varied. Ensure that the tester is fully discharged after the test.

10. Withstand Voltage

FS30 series are designed to withstand 3KVAC (10mA) 1 minute between input output for the withstand voltage test, 2KVAC(10mA) 1minute between input-FG , and 500VAC(10mA)1 minute between output-FG. The applied voltage must be increased gradually from zero to the testing value, and then decreased gradually at shut down.


Especially stay away from use of a timer. Where a pulse of several times the applied voltage can be generated.

INPUT-OUTPUT

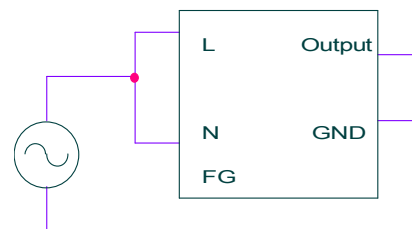


3KVAC, one minute, 10mA

INPUT-FG

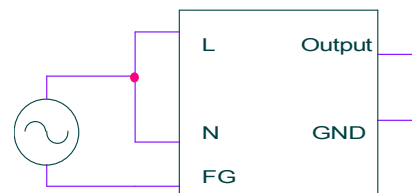

2KVAC, one minute, 10mA

OUTPUT-FG




500VAC, one minute, 10mA

FS30 Series AC-DC Converter Compact Case(Power tank II)

11. Block Diagrams

Circuit topology : Fly-back

Switching frequency : 100KHz(fixed)

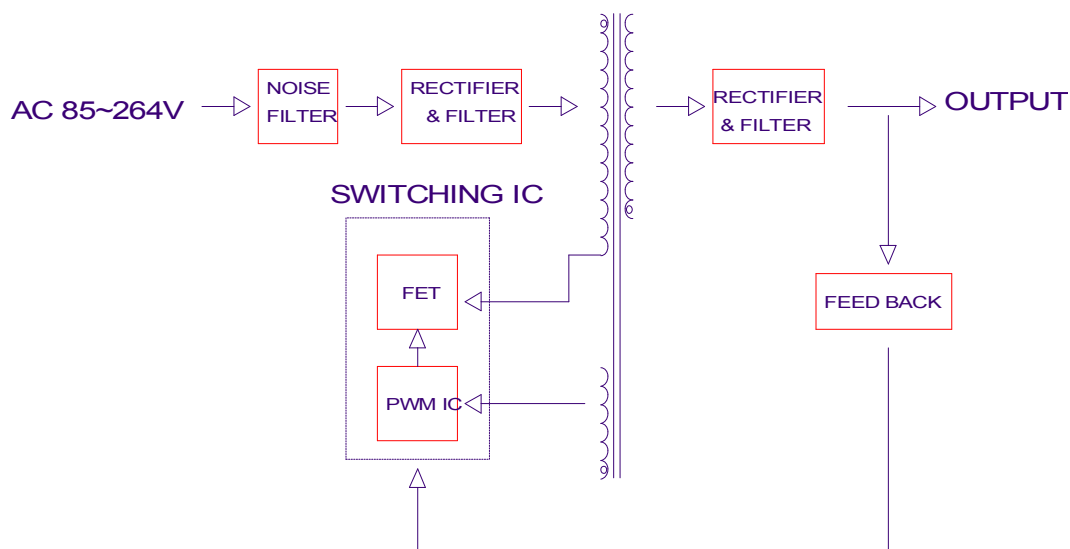

POWERPLAZA

Power Plaza co., Ltd

#1401, Daeryung Techno Town 493-6

Gasam-Dong, Kumchon-Gu, Seoul, 153-774,

Korea

Tel: 82_2_855_4955

Fax: 82_2_855_4954

E-mail: sales@powerplaza.co.kr